

Air Quality Monitoring
in
Noorvik, AK
2003 –2012
May 2013

Air Quality Division

Air Monitoring
&
Quality Assurance
Program

619 E. Ship Creek Ave. #249
Anchorage, AK 99501

Phone: (907) 269-7577
Fax: (907) 269-7508

www.state.ak.us/dec/



This page intentionally left blank



NW Arctic monitoring summary 2003-2005

In 2003 the Alaska Department of Environmental Conservation (ADEC) partnered with the Maniilaq Association to evaluate the level of fugitive dust emissions from unpaved roads in eight villages in Alaska's Northwest Arctic Borough. Field measurements were conducted during the summer seasons of 2003, 2004, and 2005. The villages of Selawik, Ambler, Kiana, Buckland, Kotzebue, Kivalina, Noatak, and Noorvik participated in the project with the initial intent of determining if a dust problem existed, and the extent of such a problem. The results of this sampling project were to be used to assess the amount of fugitive dust, to compare dust levels to the National Ambient Air Quality Standard (NAAQS), and to help develop a dust control strategy for rural Alaskan native villages.

Introduction and Research Approach

In 2003 the Maniilaq Association, Alaska Department of Transportation and Public Facilities (DOT&PF) and Department of Environmental Conservation (ADEC) started dust monitoring study in 8 native villages in Alaska's Northwest Arctic Borough. These villages are Selawik, Ambler, Kiana, Buckland, Kotzebue, Kivalina, Noatak, and Noorvik (see Figure 1). The initial phase of this effort began in February 2003 and ran during the summer seasons until September 2005. ADEC provided technical assistance to the Maniilaq Association in their effort to assess air quality and educate village residents on the potential health threat associated with the exposure to dust. Funding for the baseline assessment was provided through each village's Indian General Assistance Program (IGAP) and special grants from the Environmental Protection Agency (EPA) and the Bureau for Indian Affairs (BIA) to the Maniilaq Association. The day to day air monitoring was managed through the Maniilaq Association's environmental staff with project oversight from ADEC.

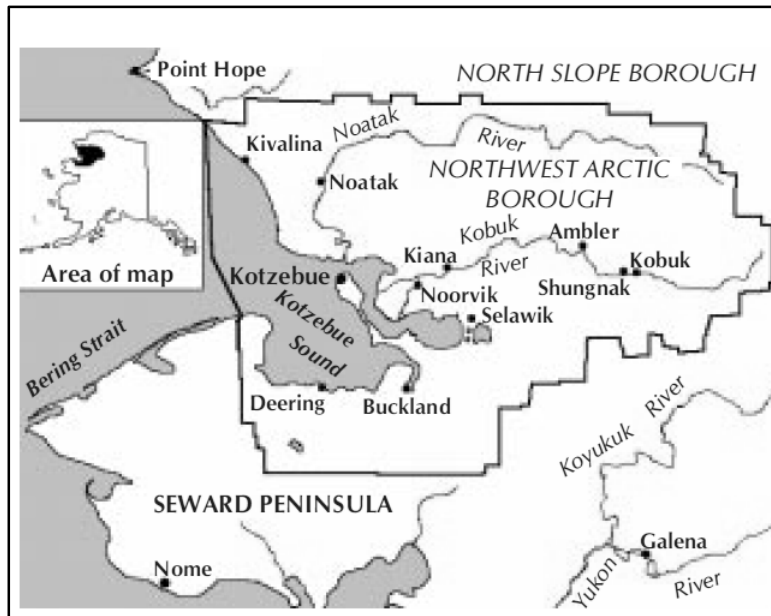


Figure 1: A map showing the eight Alaskan villages of the Northwest Arctic Borough that elected to participate in the road dust monitoring.

Sources of Dust in Rural Communities

The road systems in the villages are used by cars, trucks, motorcycles and four wheelers (ATVs) to transport residents within the community. Four wheelers are a main means of transportation within the village, and are also used as “recreation vehicles” throughout the day. Four wheelers have knobbier tires than cars and trucks, and thus pick up more dust than most other vehicles. Local dirt roads are constructed from local silt, gravel and sand. During the summer months when streets are dry and the winds are light, vehicle traffic can cause the silts and fine sands to become airborne. In addition, frequent and prolonged wind events also load the ambient air with coarse particulates, and thus affect air quality throughout the community, potentially creating an unhealthy environment for the residents. During windy episodes dirt roads can serve as sources for large dust columns, which cover the community. Average wind speeds during the summer are 4 mph, with gusts over 13mph, according to Kiana wind data provided by ADEC. To address the dust issue, some village governments water the streets during the summer months. Due to the silty makeup of the road surface and heat from the summer sun, watered streets can dry out within several hours; therefore road watering provides an effective but only short term limited relief from road dust.

Road dust remains an issue even in the fall after freeze up until there is sufficient snow on the ground to cover the road surface. During dry weather periods, the freeze-dried dust particulates are entrained by vehicle tires and the dust levels in the air can reach the same levels as during dry summer days.

The roads in the village are heavily used by pedestrians, and children frequently play in and around them. In the communities, the road is a means of vehicle transport, a walkway, and a recreational site for children. There are no sidewalks, and no front yards set back from the road—front doors face and are near to the road. The silty dust is easily blown in all directions, and can linger in the air for a while (see Figure 2). Because many community members spend a substantial amount of their time in and around the roads, the air quality samplers were set up alongside the road.



Figure 2: Kotzebue on a dusty summer day.

Public Health

Under the authority of the Clean Air Act, the United States Environmental Protection Agency (USEPA) has issued air quality standards for public exposure to safe levels of particulate matter suspended in the air. The focus of these standards is the protection of public health and welfare.

The term "particulate matter" (PM) includes both solid particles and liquid droplets found in air. Many man-made and natural sources emit PM directly or emit other pollutants that react in the atmosphere to form PM. Particles can range in size from large specks of soot to fine grains of dust with diameters about one-tenth the diameter of a strand of human hair. Fine particles (PM_{2.5}) result from fuel combustion in motor vehicles, power generation units, and industrial facilities, as well as from residential fireplaces and wood stoves. Coarse particles (PM₁₀) are generally emitted from crustal sources, such as dust generated by vehicles traveling on unpaved roads, material handling, crushing and grinding operations, as well as natural windblown dust from river gravel bars or other exposed areas.

The State and Federal air quality standards focus on “inhalable” size particulates, which are both fine and coarse. These materials can accumulate in the respiratory system and are associated with numerous health-related impacts. Exposure to coarse particles is primarily associated with the aggravation of respiratory conditions, such as asthma. Fine particles are more closely associated with increased hospital admissions and emergency room visits for heart and lung disease, increased respiratory symptoms and disease, decreased lung function, and even premature death. Sensitive groups that appear to be at greatest risk to such effects include the elderly, individuals affected by cardiopulmonary diseases such as asthma, and children. In addition to health problems, PM is a major cause of reduced visibility in many parts of the United States.

In order to maintain a healthy breathing environment, the National Ambient Air Quality Standard for PM₁₀ is set as 150 µg/m³ for a 24-hour average, (one microgram is one millionth of a gram) of particulate matter per cubic meter of air. If air monitoring results show that the concentration of PM₁₀ is greater than this amount, the EPA may demand that action is taken to reduce airborne particulate to protect the health of residents. This monitoring project was conducted in the Northwest Arctic Borough to determine if local air quality meets the National Ambient Air Quality Standard for coarse particulate matter (dust).

Monitoring Strategy

The equipment used in all communities to evaluate the concentration of airborne dust particles in ambient air was the Andersen High-Volume (Hi-Vol) PM₁₀ sampler – an EPA designated Federal Reference Method (FRM) monitor. FRM sampling followed a 1 in 3 (1 in 6 in 2011 -12) monitoring schedule for the majority of the time, meaning that a new sample filter was installed and the sampler operated every third day for 24 hours. Before being placed in the sampler, filters were pre-weighed on a high-precision scale in the laboratory to determine the weight of the filter without any dust deposit. The filter was then installed in the sampler, which used a mechanical timer to turn it on at midnight of the sample day and turn it off after it sampled for twenty-four hours. Ambient air was drawn in through the sampler head and filter media by a pump, similar to a vacuum cleaner motor so that airborne particulates were trapped on the filter. After sampling, the filter was returned to the laboratory and weighed again to determine how much dust was deposited on the filter. The difference between the two weights divided by the volume of air is the measurement that is used to determine 24-hour concentrations of PM₁₀. The samplers were set up alongside dirt roads in the communities, near a reliable power source, and near frequently-used routes where the most individuals were expected to be exposed.

The state and federal 24-hour health based standard for dust particulate size was set at 150µg/m³ in 1987. During the sampling period between February 2003 and September 2005, 29

exceedances of the standard were reported using the Federal Reference Method Hi-Vol (High Volume) samplers. The maximum dust level reported was $608\mu\text{g}/\text{m}^3$ (in Noorvik on July 23rd, 2004). The greatest number of exceedances was observed in Noatak (9 validated samples). Kotzebue and Selawik both measured no exceedances, but Kotzebue had a higher average concentration of dust. For reference, the Federal Air Quality Standard for dust states that if a community has more than two exceedances of the standard in a year, averaged over a three-year period, the state and U.S. Environmental Protection Agency may declare the area non-attainment and require the community to take official steps to lower dust levels.

Noorvik 2011 – 2012 dust monitoring (after dust palliatives application)



Introduction

The purpose of 2011-2012 monitoring in Noorvik was to compare the road dust concentration levels after applying dust suppressants on selected roads (in late summer 2010) to the levels measured during the summers of 2003, 2004 prior to application. In 2003 we recorded one elevated value ($374\mu\text{g}/\text{m}^3$) of the National Ambient Air Quality Standard (NAAQS; $150\mu\text{g}/\text{m}^3$) and in 2004 eight elevated values ($153\text{--}608\mu\text{g}/\text{m}^3$). Noorvik received three different dust suppressants and a trailer mounted palliative sprayer as part of the Alaska Department of Transportation and Public facilities (ADOT & PF) pilot study in 2010.

Noorvik monitoring site specifics:

During our two year monitoring period (2011-2012) ADEC came across few challenges, related to road maintenance and its related air quality issues. Our air quality monitoring was part of the project focusing on the effectiveness of dust palliatives for reducing dust in rural villages caused by traffic.

Noorvik Summer 2011 (One year after dust palliatives application)

Following the EPA sampling schedule of collecting samples every sixth day for 24 hours there were 17 possible sample days in summer 2011 sampling period. Flow checks were performed by ADEC personnel once a month in July, August, September and November. The site operators (Lonnie Tebbits and Irvin Newlin) did an excellent job and did not miss a single sample date nor filter change. ADEC received 17 run filters for the entire summer sampling period, out of which 16 were exposed on the scheduled day and for 24 hours. One filter ran too long. The project data capture was 94% and all data was valid according to EPA requirements. There was only one elevated value of $191\mu\text{g}/\text{m}^3$ out of all 17 sampled filters. The results from the sample analysis are summarized in the table 1 and figure 3 below.

Table 1: Hi-Vol - summary of filter PM_{10} concentration for each ‘run’ date in summer 2011

(24-hour average concentration over $150\mu\text{g}/\text{m}^3$ bold; highlighted in red)

Run Date	Filter #	Weight ($\mu\text{g}/\text{m}^3$)	Comments
07/26/2011	Q0512596	74	
08/01/2011	Q0512597	191	
08/07/2011	Q0512598	92	Run too long (1934.5min)
08/13/2011	Q0512600	8	Rained in the morning
08/19/2011	Q0512601	120	
08/25/2011	Q0512110	6	
08/31/2011	Q0512111	6	
09/06/2011	Q0512112	4	
09/12/2011	Q0512113	14	
09/18/2011	Q0512114	6	
09/24/2011	Q0512115	4	
09/30/2011	Q0512116	21	

10/06/2011	Q0512117	73	
10/12/2011	Q0512602	148	High winds all day, snow in the afternoon
10/18/2011	Q0512603	6	2" -3" snow on the ground
10/24/2011	Q0512604	36	High east wind , snow showers
10/30/2011	Q0512605	14	Smelled smoke on the filter

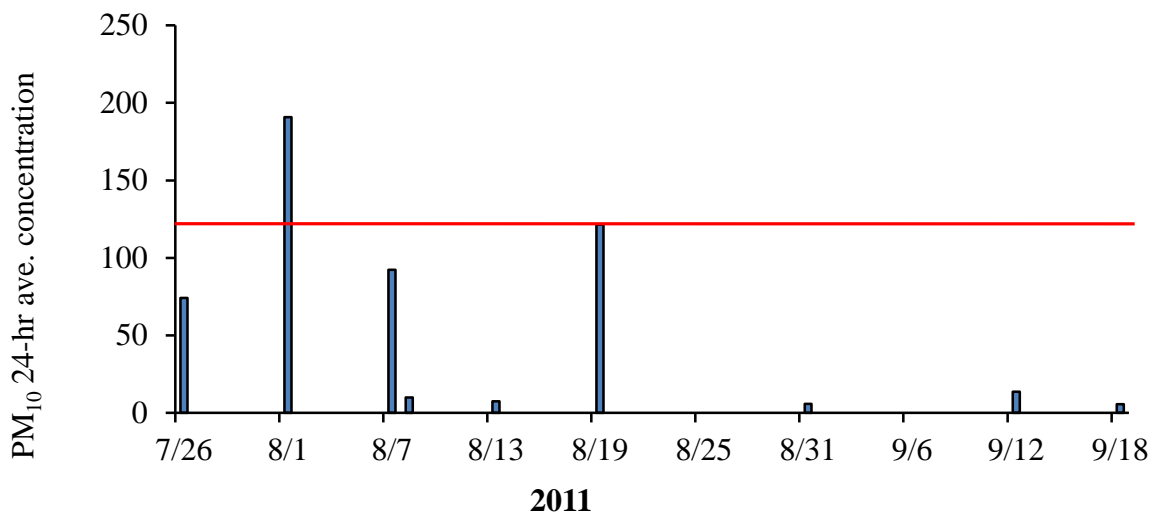


Figure 3: Hi-Vol PM10 24-hour average concentration compared to NAAQS (red line) in summer of 2011

The site was shut down by site operators on November 1st 2011, when the snow covered the roads and remained on the ground.

Noorvik Summer 2012(Two years after the application of dust palliatives)

The monitoring continued for the dust levels in Noorvik, in summer of 2012. ADEC used the HiVol monitor (High Volume sampling method), as in previous years, and added a continuous monitor Met One EBAM (Environmental Beta Attenuation Monitor), which was set to sample every hour. The EBAM recorded hourly PM₁₀ levels as well as ambient temperature, barometric pressure, wind speed and wind direction from June through August 2012. The EBAM monitor was shut down in August because freezing temperatures can have a negative impact on the instrument performance. The Hi-Vol monitor operated on the EPA one in six day schedule until the end of November 2012.

The EBAM monitor was co-located with the Hi-Vol monitor located next (approximately 3feet) to the road treated with dust palliatives The EBAM was used to obtain continuous real time 1-hour average data accessible through internet/ Satellite connection any time.

ADEC compared the data collected by the continuous EBAM sampler and the HiVol. The HiVol sampler is federal reference Method (FRM) sampler and requires manual filter changes depending on sampling schedule (in this study 1 in 6 days). Both monitors are designed to sample PM₁₀, but the HiVol air intake is greater (1000 l/min) than the EBAM (16.7 l/min). The HiVol sampling filters PM₁₀ are weighted in the lab, and ADEC calculates particulate mass concentration. The EBAM calculates the particulate mass concentration at the end of every hour and averages these values for 24 hour period. The advantage of the EBAM is that the instrument is accessible any time through at the satellite modem connection, collects temperature, pressure, wind speed and direction while sampling, which helps to understand the characteristics of dust events at the site. Lose

Federal Reference Method HiVol Monitor

There were 27 possible sampling days during the summer 2012 sampling period when following the EPA sampling schedule requiring sampling every sixth day for 24 hours from midnight to midnight. Flow checks were performed periodically by DEC personnel once a month in July, August and October. The site operators (Lonnie Tebbits and Irvin Newlin) again did an excellent job and did not miss a single run date. ADEC received 27 exposed filters for the entire summer sampling period all following the EPA schedule. The data capture was 100% and all data was considered valid according to the EPA requirements. There were six values above the NAAQS. The results from the sample analysis are summarized in the table below.

Table 2: Hi-Vol - summary of filter PM₁₀ concentration for each 'run' date in summer 2012

(24-hour average concentration over 150 µg/m³ bold; highlighted in red)

Run Date	Filter #	Weight (µg/m ³)	Comments
06/26/12	Q9510421	209	Rained on 6/25/2012
07/02/12	Q9510422	371	
07/08/12	Q9510423	210	
07/14/12	Q9510424	62	Run day before
07/20/12	Q9510425	13	Rain Showers
07/26/12	Q9510426	8	Rain, Rain, Rain
08/01/12	Q9510427	8	Rain showers day before
08/07/12	Q9510428	35	No more rain
08/13/12	Q9510429	114	Finally some nice weather
08/19/12	Q0555030	4	Too much "sailus" (rain)
08/25/12	Q0555031	0	Rain showers on run day
08/31/12	Q0555032	3	
09/06/12	Q0555033	9	Rain showers
09/12/12	Q0555034	26	Finally some nice weather
09/18/12	Q0555035	3	Still raining
09/24/12	Q0512606	9	It's snowing
09/30/12	Q0512607	4	Still raining
10/06/12	Q0512608	5	
10/12/12	Q0512609	450	
10/18/12	Q0512610	157	
10/24/12	Q9510452	39	Nice weather about 1/2' snow
10/30/12	Q9510453	46	
11/05/12	Q9510454	187	
11/11/12	Q4016227	11	
11/17/12	Q4016228	29	Cold clear day, no snow
11/23/12	Q4016229	20	Clear& cold, no snow
11/29/12	Q4016230	26	Clear& cold, no snow

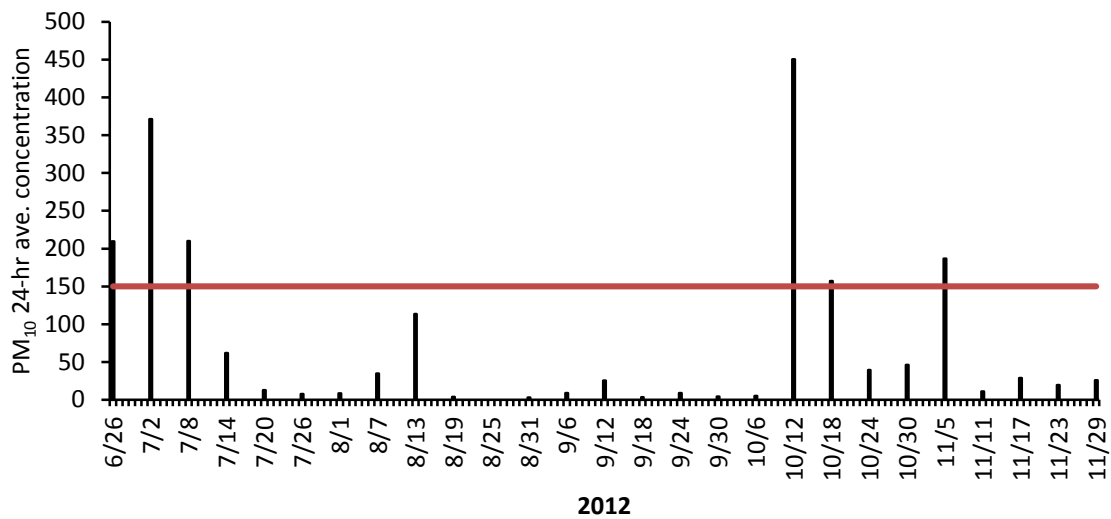


Figure 4: Summer 2012 Hi-Vol PM₁₀ 24-hour average concentration compared to NAAQS (red line)

EBAM sampler

The highest values recorded by the EBAM sampler occurred during June and July. The EBAM monitor operated continuously for 3 months starting on June 19, 2012, collecting hourly PM₁₀ concentrations, ambient temperature, relative humidity, wind speed and direction. The meteorological parameters provided information about weather patterns associated to dust events at the site. The monitor is set to Greenwich Time (GMT)

Note: The EBAM sampler is not an EPA approved reference method and cannot be compared to the NAAQS. ADEC only used the EBAM for real time PM₁₀ data access, as well as temperature, relative humidity and wind speed and direction. In addition the calculated 24-hour averages were used to assess the suitability of the EBAM for PM₁₀ road dust measurements in remote locations. The correlation between the EBAM and the HiVol was unsatisfactory. During the time both samplers operated collocated, the EBAM on average only captured roughly 61% of the particulate mass concentration measured by the HiVol.

Table 3: PM₁₀ 24-hour average values measured by continuous EBAM monitor

(24-hour average concentration over 150 µg/m³ bold; highlighted in red)

Noorvik 2012 Day	PM ₁₀ Values µg/m ³		
	June	July	August
1		167.4	3.4
2		238.8	9.1
3		129.6	4.8
4		26.1	9.1
5		26.8	10.2
6		161.2	22.8
7		180.0	39.4
8		194.2	61.3
9		99.3	96.2
10		158.6	141.9
11		236.3	96.5
12		111.7	53.0
13		20.3	11.0
14		16.9	5.9
15		54.2	0
16		51.8	1.6
17		11.4	0
18		4.7	0
19	216.8	7.5	1.7
20	170.2	118.8	0.4
21	138.5	20.2	
22	95.2	3.5	
23	131.6	6.5	
24	62.0	1.0	
25	39.9	0.6	
26	113.3	5.0	
27	170.0	4.3	
28	164.4		
29	155.3		
30	290.6		
31			

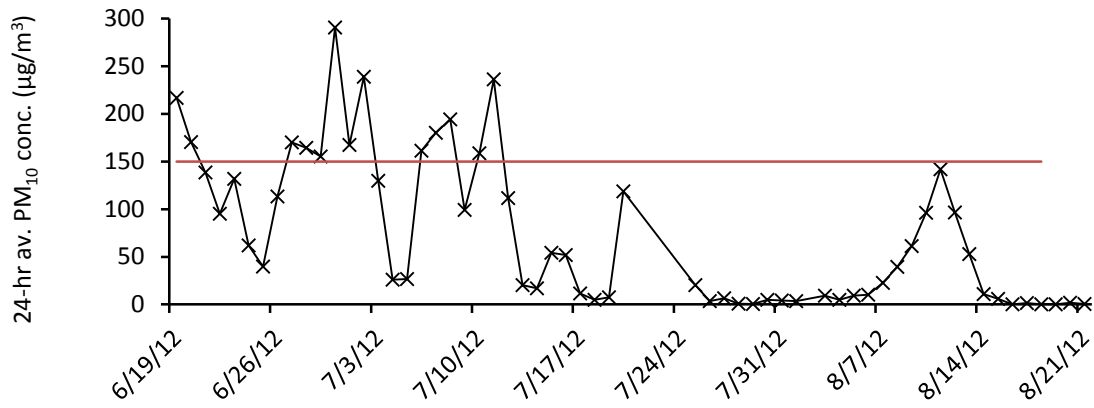


Figure 5: EBAM data summary summer 2012 compared to NAAQS (red line)

Discussion and Conclusion

The three different types of dust suppressants (Alastac, FB 400 and Earth Armour) were applied on three sections of the most traveled roads in Noorvik in June in 2010. Unfortunately, there is no map available to locate which type of dust suppressant was use on which part of road in the village.

The dust palliatives were applied on the grated roads in late summer 2010 with the help of ADOT & PF. The precipitation levels were high during both monitoring seasons but the PM₁₀ concentration levels still exceeded the NAAQS. In 2011 ADEC measured one elevated value of 191 µg/m³ and six elevated values (157 ~ 450µg/m³) in 2012. There were more elevated values (above 150µg/m³) in 2012 than in 2011, even with unusually high precipitation in the reign. The dust palliatives were applied on the roads in late summer of 2010 and have not been re-applied before the monitoring. The results clearly point at the fact that the effectiveness of dust palliatives decreases with time and the roads should be treated on a regular basis to keep the dust level down. Success and longevity of dust suppressant applications depend on many factors, a discussion of which is beyond the scope of this report.