


102.26.025

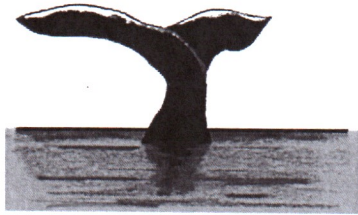

**Travis/Peterson
Environmental Consulting, Inc.**

Michael D. Travis P.E.
Principal

3305 Arctic Boulevard, Suite 102
Anchorage, Alaska 99503

Phone: 907-522-4337
Fax: 907-522-4313
e-mail: mtravis@tpeci.com

Laurence A. Peterson
Operations Manager

329 2nd Street
Fairbanks, Alaska 99701

Phone: 907-455-7225
Fax: 907-455-7228
e-mail: larry@tpeci.com

October 12, 2007
1063-07

ASRC Energy Services, Inc.
3900 C Street, Suite 701
Anchorage, Alaska 99503

Attention: Mr. Rick Owens

Re: Decommissioning Monitoring Wells

Dear Mr. Owens:

Travis/Peterson Environmental Consulting, Inc. (TPECI) was contracted by ASRC Energy Services, Inc. (ASRC) to decommission monitoring wells located at 3319 Industrial Avenue, in Fairbanks, Alaska (Figure 1).

18AAC 80.015.Sec. 4.10 requires the well owner to provide the following information to the Alaska Department of Environmental Conservation:

- Scope of work and contact names;
- Description of the wells;
- Grout mixture;
- Grout placement method; and
- Protective measures ensuring abandoned well integrity.

SCOPE OF WORK AND CONTACT NAMES

Soils Alaska was the vendor contracted to pull and grout the wells. Mr. Ron Drumhiller was the representative for Soils Alaska. On October 10, 2007, Soils Alaska personnel completed the decommissioning of five monitoring wells on the subject property.

MONITORING WELLS

Monitoring wells MW-1, MW-2, MW-3, MW-4, and MW-5 were removed on October 10, 2007. The decommissioned monitoring wells are circled in Figure 2.

RECEIVED

OCT 16 2007

**CONTAMINATED
SITES
FAIRBANKS**

CASING REMOVAL

MW-1, MW-2, and MW-3 were 0.5" stick up wells. These wells were pulled from the ground using a chain (See Photographic Log attached). MW-4 and MW-5 were 1.5" steel flush mount wells. These wells were pulled from the ground using a chain. All wells were filled using benseal bentonite and sand. Well monuments were removed from the ground using a chain.

GROUT MIXTURE

The grout was a bentonite and water mixture.

GROUT PLACEMENT METHOD

The bentonite was poured dry into the auger hole. Water was then added to hydrate and harden the bentonite.

PROTECTIVE MEASURES ENSURING ABANDONED WELL INTEGRITY

All wells were removed from the site in accordance with 18AAC 80.015.Sec. 4.10.



Sincerely,



Ryan C. Peterson
Environmental Technician

Attachments: Figures
Photographic Log

cc: Jim Frechione, Environmental Program Manager, ADEC

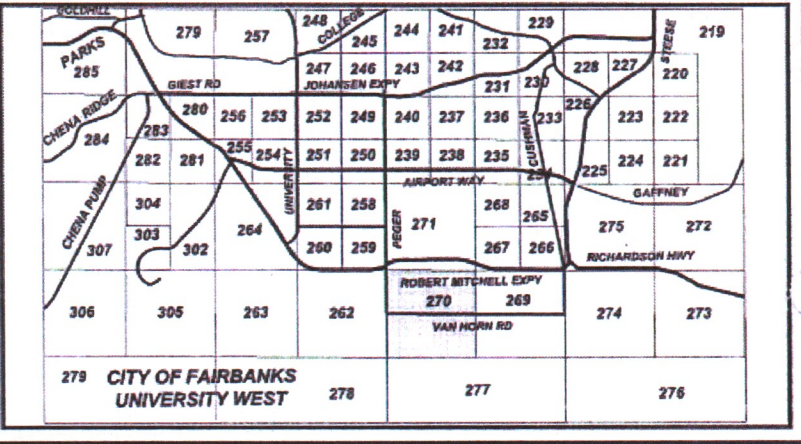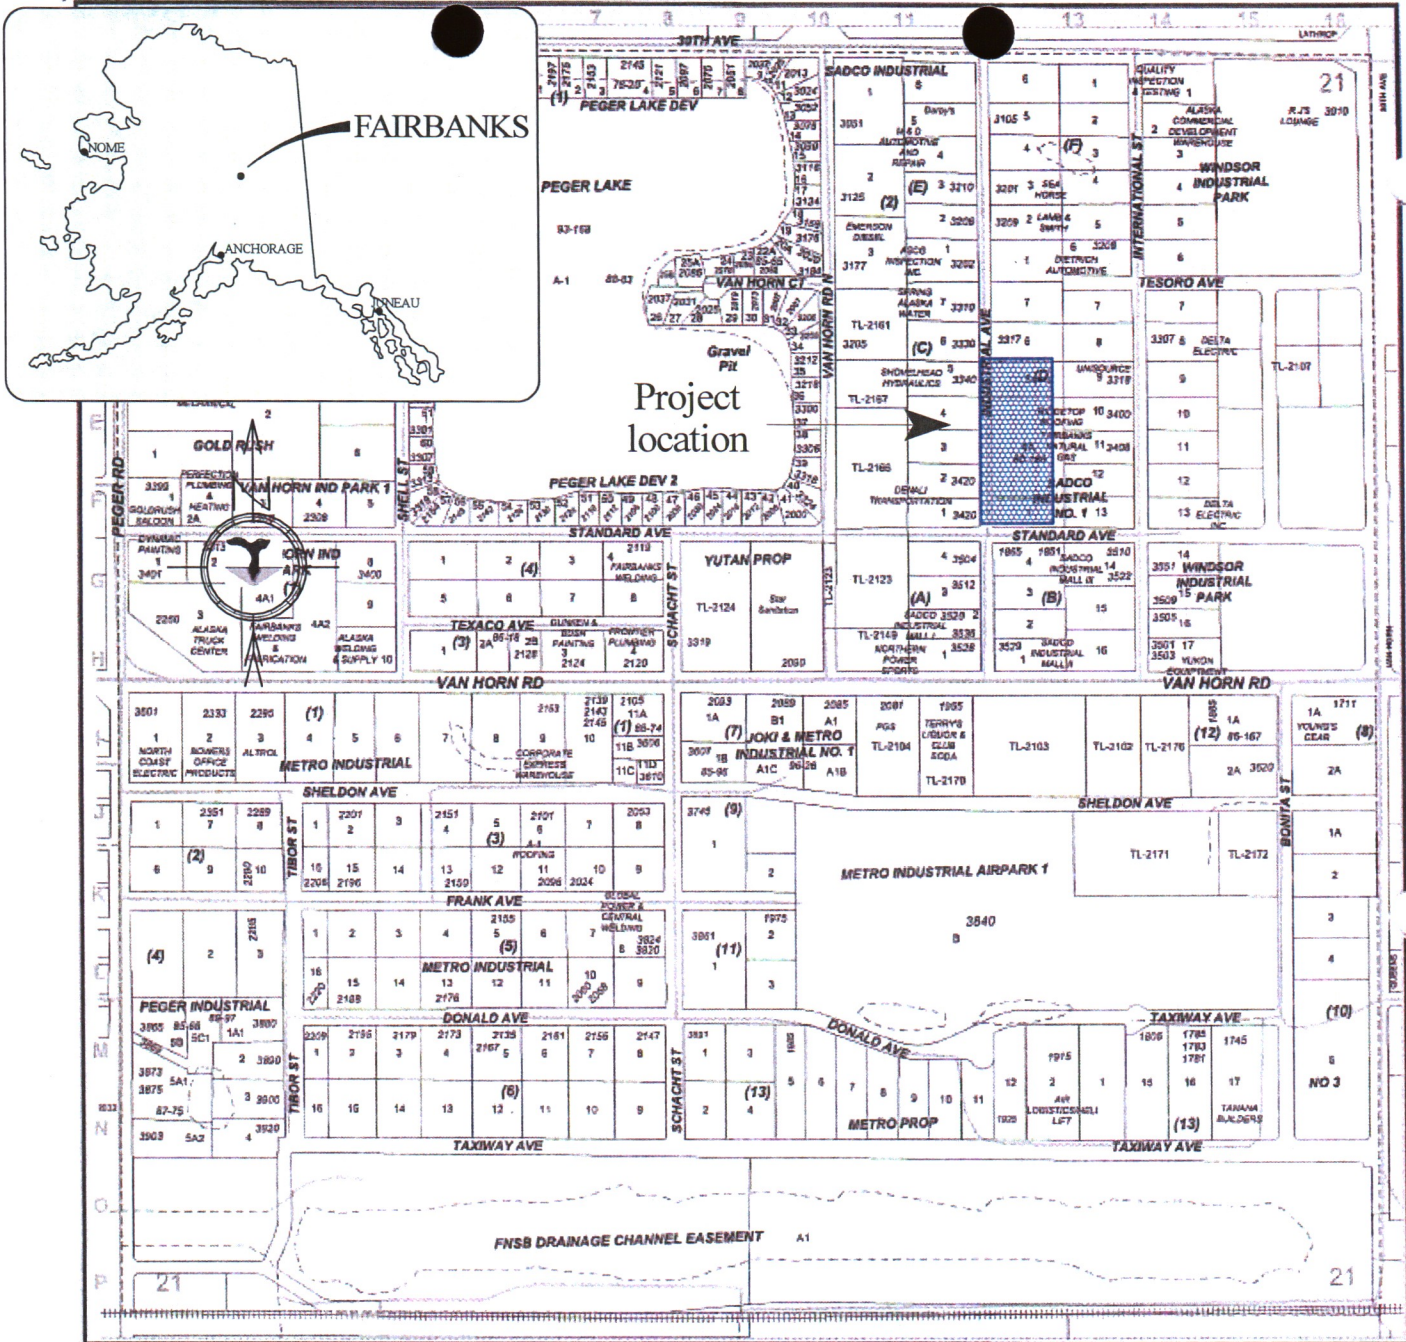

LOT 5

LOT 4A

DRINKING WATER SUPPLY WELL
NO LONGER USED

LEGEND

SOIL BORING LOCATION

MONITORING WELL LOCATION

INDUSTRIAL AVENUE

TH-4

TH-3

10,000 gallon
Heating oil UST

TH-2

TH-5

TH-6

TH-1

#2

#1

City Sewer
Lift Station

Septic
Tank

Septic
Cleanout

Battery
Acid

100 gal Oil Day
tank (upstairs)

OFFICES

Oil/Water
Separator?

Holding Tank
for Floor Drains

Dirt Floor

Concrete Floor

Dirt Floor

Floor
Drains

Fire Extinguisher
Repair Office

Former mechanic's pit.
NOTE: Backfilled with concrete in 1997.
Was connected to drain which led to
oil/water separator.

MW-2

MW-3

MW-4

FORMER UST STORAGE
AND FUELING ISLAND AREA

MW-5

MW-1

LOT 1

CIRCLED WELLS HAVE BEEN DECOMMISSIONED

TRAVIS/PETERSON ENVIRONMENTAL CONSULTING, INC.
329 2ND STREET
FAIRBANKS, ALASKA 99701

ASRC
3319 INDUSTRIAL AVENUE

FIGURE 2
SITE PLAN

PROJECT: 1063-07

FILE: PROJECTS/1063/07/FIGURES/FIGURE 2.SKF

DATE: 10/12/07

SCALE: NO SCALE



Photo 1:
Well MW-5 prior to it's removal.



Photo 2:
Well MW-1 Prior to its removal.



Photo 3:
Removal of well MW-1 monument.



Photo 4:
Removal of Well MW-1.



Photo 5:
Removal of well MW-5.



Photo 6:
Applying Benseal
Bentonite grout after
removal of well MW-1.



Photo 7:

Location of well MW-1
after its removal.