Active Discharge Points during Haul Out

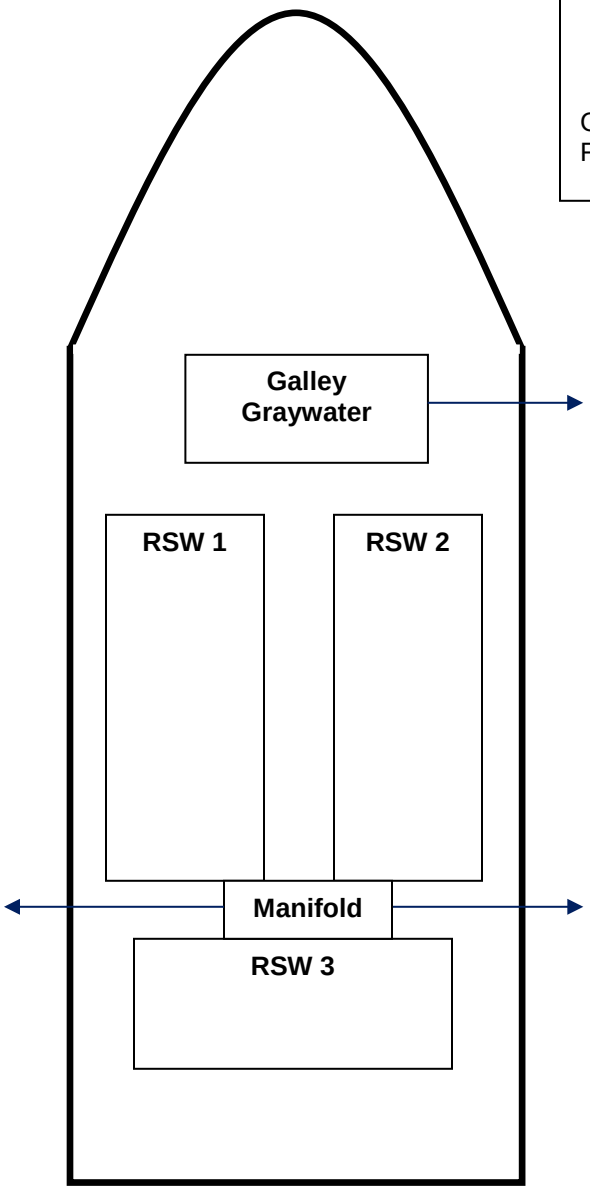

Discharge Rates (gallons per day)

	Max	Avg
Gray water	Neg.	Neg.
Fish hold pumps	2.59 MM	2.59 MM

Discharge Narrative

The F/V Viking Queen has three active discharge ports when the vessel is hauling gurry. Discharge points include the galley sink and the port and starboard fish hold manifold discharge ports. The three fish holds are connected to a manifold controlled by manual valves. The holds are emptied one at a time. The fish hold circulation/discharge pumps operate at approximately 1,800 gpm.

The diagram does not depict actual fish hold arrangement.