

**ALASKA DEPARTMENT OF
ENVIRONMENTAL CONSERVATION**



Amendments to:

State Air Quality Control Plan

Vol. II: III.D.7.3

Non-Attainment Area Boundary and Design Episode Selection

Public Notice Draft

May 10, 2019

Michael J. Dunleavy, Governor

Jason W. Brune, Commissioner

7.3 Nonattainment Area Boundary, Air Quality Control Zones, and Design Day Episode Selection

7.3.1. Nonattainment Area Boundary

After EPA lowered the 24-hour ambient PM_{2.5} standard from 65 micrometers per cubic meter ($\mu\text{g}/\text{m}^3$) to 35 $\mu\text{g}/\text{m}^3$ in December 2006, States were required to examine monitoring data collected within their communities and make designation recommendations based on the new standard by December 2007. After an examination of monitoring data collected at the State office building in downtown Fairbanks from 1999–2006, DEC recommended that Fairbanks be designated nonattainment for the revised PM_{2.5} standard. Based on this recommendation, EPA initiated a process to define the size of the PM_{2.5} nonattainment area within Fairbanks. Since monitoring data were collected at only one location, this process did not have much insight into how concentrations varied throughout the Borough. This resulted in EPA initially suggesting that a large portion of the Borough be designated nonattainment (to be conservative). In response, the State and Borough assembled an extensive set of data describing population density; terrain; meteorology; available air quality data, including limited measurements from Fort Wainwright and Eielson Air Force bases; available emission inventory estimates; etc. This information ultimately led to the selection of a much smaller final PM_{2.5} nonattainment boundary for Fairbanks. The PM_{2.5} boundary is different than the previously defined carbon monoxide (CO) boundary specified for Fairbanks. The boundary is important because it defines the area that is subject to regulatory controls needed to produce reductions in ambient concentrations to attain the standard.

Figure 7.3-1 shows a map of the nonattainment area boundary. The EPA rulemaking establishing the PM_{2.5} nonattainment area¹ included the following townships and ranges within the Fairbanks North Star Borough:

- MTRS F001N001W—All Sections;
- MTRS F001N001E—Sections 2–11, 14–23, 26–34;
- MTRS F001N002W—Sections 1–5, 8–17, 20–29, 32–36;
- MTRS F001S001E—Sections 1, 3–30, 32–36;
- MTRS F001S001W—Sections 1–30;
- MTRS F001S002E—Sections 6–8, 17–20, 29–36;
- MTRS F001S002W—Sections 1–5, 8–17, 20–29, 32–33;
- MTRS F001S003E—Sections 31–32;
- MTRS F002N001E—Sections 31–35;
- MTRS F002N001W—Sections 28, 31–36;
- MTRS F002N002W—Sections 32–33, 36;
- MTRS F002S001E—Sections 1–2;
- MTRS F002S002E—Sections 1–17, 21–24; and
- MTRS F002S003E—Sections 5–8, 18.

¹ Federal Register, Vol. 74, No. 218, Friday, November 13, 2009, pages 58688-58781.

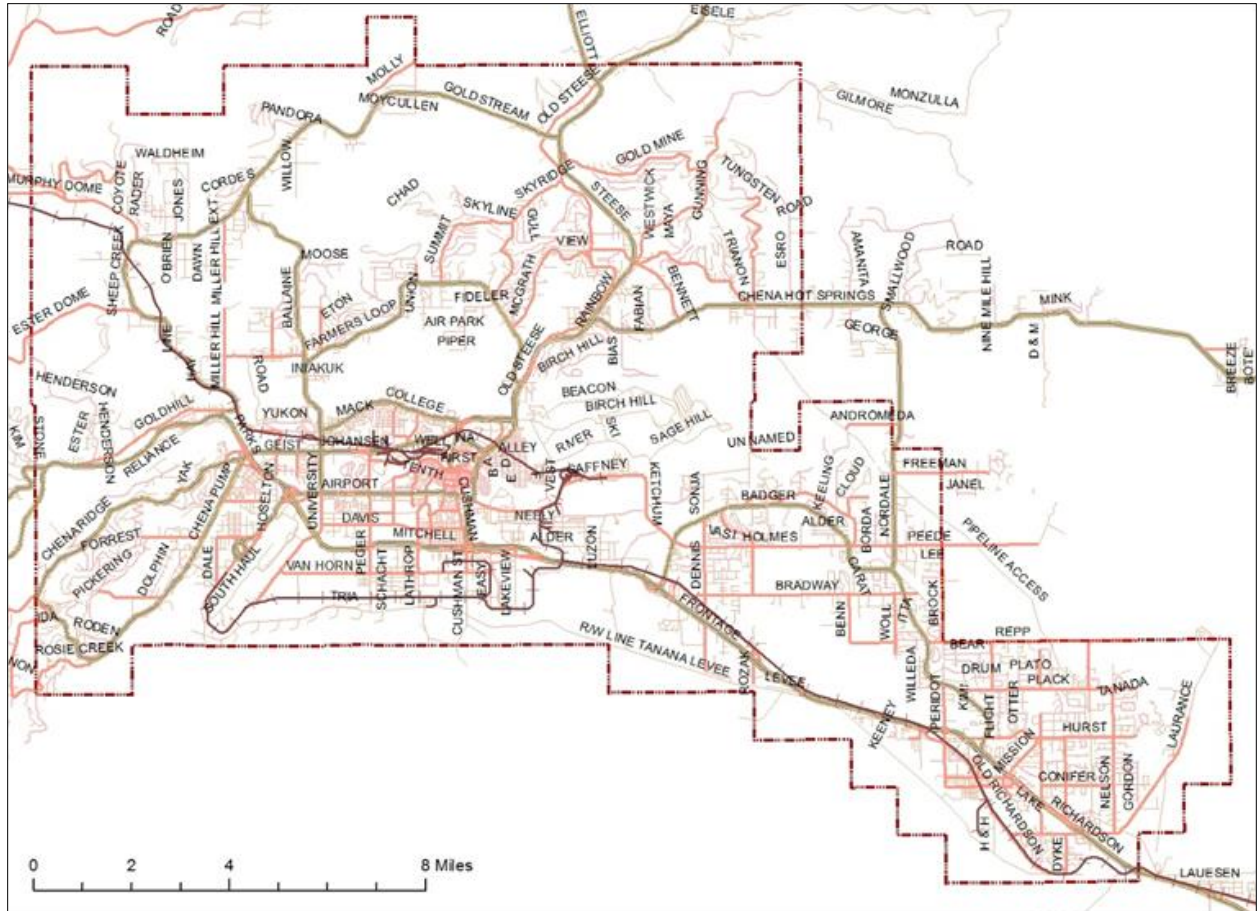


Figure 7.3-1. Fairbanks PM_{2.5} Nonattainment Boundary

Eielson was excluded from the nonattainment area because monitoring data from the base showed that PM_{2.5} concentrations were dramatically lower than those collected in downtown Fairbanks and meteorological data showed that upper air wind flows, which move the plume from the Central Heat and Power Plant, were rarely in the direction of the nonattainment area when concentrations were above the standard. Conversely, no measurements were available to document concentrations within the Ester and Goldstream Valleys. Since these areas are growing and have similar meteorology to the downtown area, where elevated concentrations have been recorded, they were included within the nonattainment boundary. Because preliminary measurements collected by the Borough at the Transportation Center on Peger Rd. and in North Pole indicated that these areas experienced elevated PM_{2.5} concentrations, they were also included within the nonattainment boundary.

A detailed rationale for the Nonattainment Boundary selection can be found in Appendix III.D.7 3.

7.3.2. Air Quality Control Zones

DEC adopted 18 AAC 50.025(d) which establishes three “air quality control zones” within the nonattainment area to allow sub-area specific control measures. The zones (see Figure 7.3-2) are based on an ordinance adopted by the FNSB delineating the Fairbanks and Goldstream control zones and a boundary between Fairbanks and North Pole control zones developed by the FNSB Air Quality Program. The regulation follows:

- 18 AAC 50.025 (d)

To establish control measures for reduction of PM-2.5 within the Fairbanks and North Pole urban nonattainment area, the area is divided into three “air quality control zones” as follows:

- (1) North Pole Control Zone;
- (2) Fairbanks Control Zone; and
- (3) Goldstream Control Zone.

The control zones allow DEC to develop sub-area specific regulatory control measures within 18 AAC 50 to target area-specific problems. Recent monitoring data shown in table 7.3.2.1 demonstrates the disparity in air quality at locations within the proposed control zones. It may prove reasonable and necessary in the future to identify controls specific to smaller sub-areas within the nonattainment area.

Federal Reference Method (FRM) monitoring at the North Pole/Hurst Road site has shown significantly higher concentrations of PM_{2.5} than Fairbanks FRM monitoring. The 2018 North Pole 24-hr design value calculated using quality controlled, non-exceptional event, FRM data from 2016, 2017, and 2018 is 65 µg/m³. Table 7.3.2.1 summarizes FRM data and design values for North Pole and Fairbanks.

Table 7.3.2.1

PM _{2.5} Monitoring Sites	AQS Site ID	98 th Percentile (FRM)			2017 24-hour Design Value (FRM)
		2016	2017	2018	24-hr
Fairbanks / State Office Building	02-090-0010	39.7	38.0	27.0	35
Fairbanks / NCORE Site	02-090-0034	30.3	34.4	25.3	30
North Pole / Hurst Road (previously named North Pole Fire #3)	02-090-0035	66.8	75.5	52.8	65

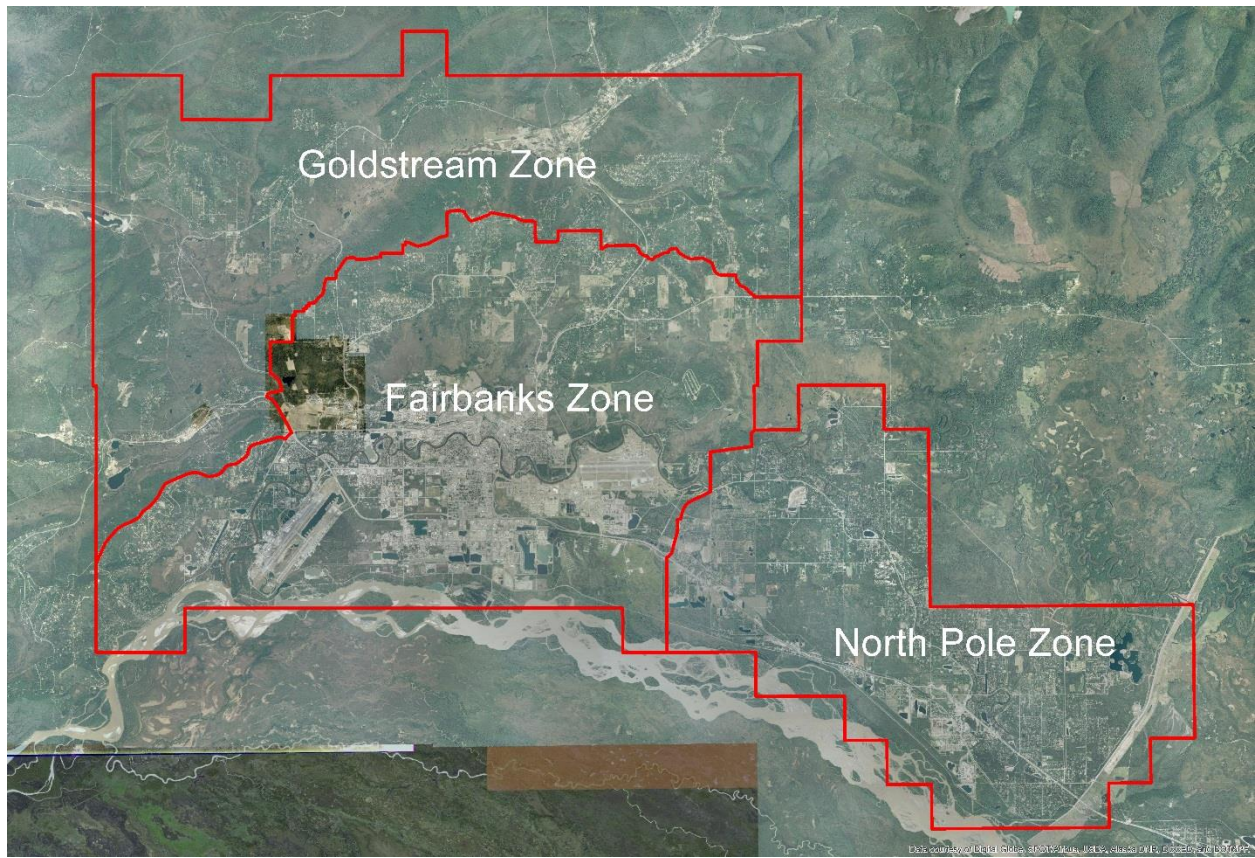


Figure 7.3-2. Air Quality Control Z

7.3.2.1. North Pole Control Zone

The North Pole-Fairbanks air quality control zone boundary was recommended by the FNSB Air Quality Program. Figure 7.3-3 shows the boundary. The formal boundary between the North Pole and Fairbanks air quality control zones boundary follows this path:

- Beginning at the northeast corner of MTRS F001S001E Section 10;
- Southwest to Hobgoblin lane;
- South along Hobgoblin Lane to its intersection with Prester John Drive;
- West along Prester John Drive to its intersection with Sonja Street;
- South along Sonja Street and continuing along the section line to its intersection with Badger Road;
- Southwest along Badger Road to its intersection with the northern border of MTRS F001S001E Section 21;
- West along the northern border to the northwest corner of MTRS F001S001E Section 21 NE $\frac{1}{4}$ NW $\frac{1}{4}$;
- South along the western border of MTRS F001S001E Section 21 NE $\frac{1}{4}$ NW $\frac{1}{4}$ to its intersection with Badger Road;
- South on Badger Road to its intersection with the western border of MTRS F001S001E Section 21; and
- South along the section line and ending at the section line's intersection with the southern nonattainment area border at the southwest corner of MTRS F001S001E Section 33.



Figure 7.3-3. Fairbanks-North Pole Air Quality Control Zone Boundary

7.3.2.2. Fairbanks Control Zone

The Fairbanks Control Zone is separated from the Goldstream and North Pole control zones by the North Pole-Fairbanks (see figure 7.3-3) and Goldstream-Fairbanks (see figure 7.3-4) boundaries.

7.3.2.3. Goldstream Control Zone

The Goldstream Control Zone is the northern portion of the nonattainment area which is not included in the FSNB Air Quality Control Zone encompassing DEC's Fairbanks and North Pole control zones. Figure 7.3-4 shows the Goldstream Fairbanks control zone boundary. The Goldstream-Fairbanks control zone boundary is defined in FNSB Ordinance 21.28.010.

The boundary between Fairbanks and Goldstream control zones is the Northern Border of the FNSB "Air Quality Control Zone" generally defined in 21.28.010 as:

"Air quality control zone" means the area of the borough currently contained in the EPA designated *nonattainment area*, which uses the *nonattainment area* southern, western and eastern boundaries as modified by their respective intersection with the following northern boundary described as: beginning at the intersection of Isberg Road with Chena Ridge Road on the western boundary of the EPA designated *nonattainment area*, then following Chena Ridge Road back to Chena Pump Road and continuing north on the Parks Highway to Sheep Creek Road, then Sheep Creek Road to Miller Hill Road, then north on Miller Hill Road, then east on Yankovich, then north from Yankovich Road along the east boundary of the Large Animal Research Station to a point just north of its intersection with Nottingham Drive and follows the ridge crest across Nottingham Estates to approximately the point where Swallow Drive intersects Dalton Trail to north on Dalton Trail to the crest of the Farmer's Loop Ridge, then follow the geographic crest of Farmer's Loop Ridge to its intersection with the New Steese Highway, then southeast on Bennet Road, and along Steel Creek Road to the intersection of Chena Hot Springs Road, and Chena Hot Springs Road to the eastern boundary of the EPA designated *nonattainment area*.

The general description references geographic ridgelines which is undesirable because they cross individual properties. To correct this, FNSB Air Quality staff administratively defined the northern boundary of the Air Quality Control Zone using public right-of-way, subdivision boundaries, and individual lot boundaries, while following the intended geographic features as closely as possible. On March 26, 2015, the FNSB adopted Resolution number 2015-12 to confirm these exact boundaries of the air quality control zone. The resolution is included as Attachment B to Appendix III.D.7.3.

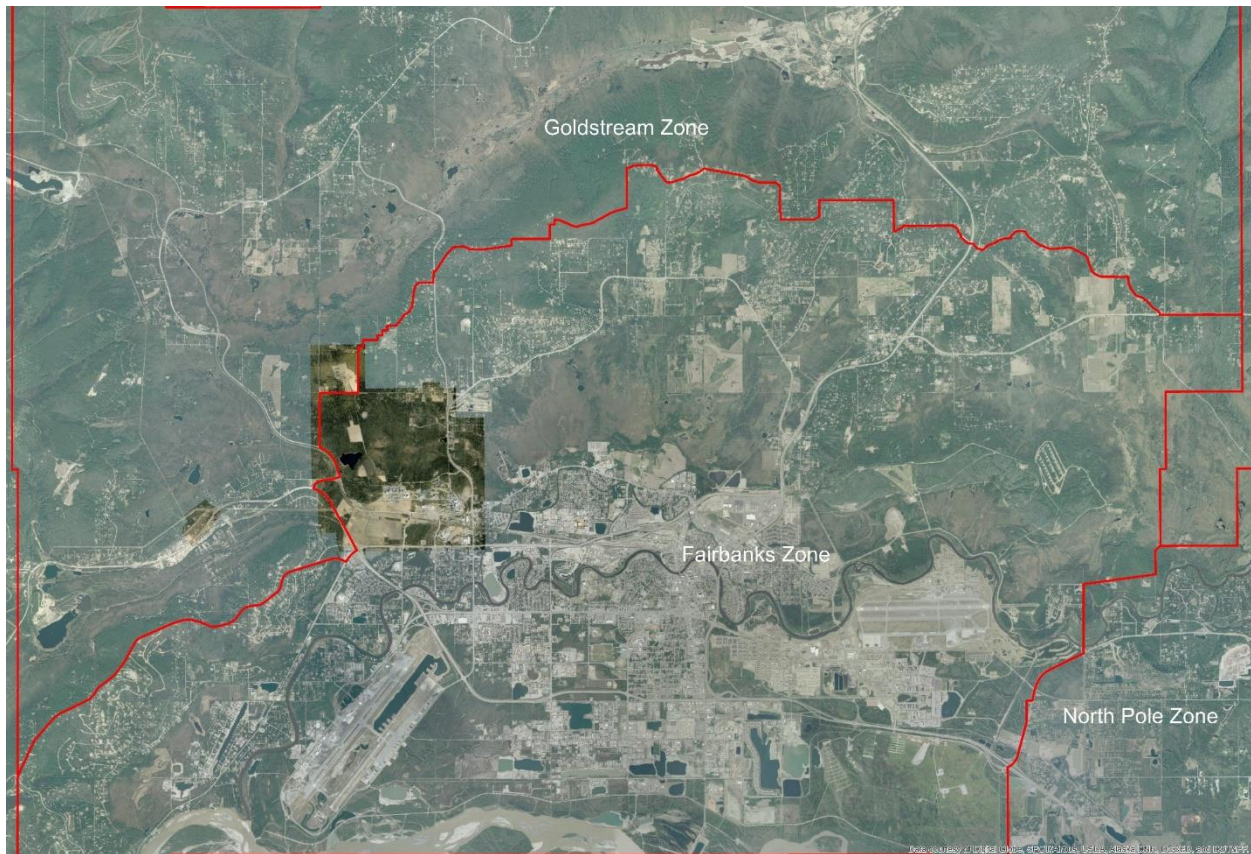


Figure 7.3-4. Goldstream-Fairbanks Control Zone Boundary

7.3.3. Summary of Design Day/Episode Selection for the Fairbanks PM_{2.5} Nonattainment

Sections 108 and 109 of the Clean Air Act (CAA) require EPA to regularly review and update the NAAQS. As previously discussed, in 2006, EPA strengthened the 24-hour fine particle standard from the 1997 level of 65 $\mu\text{g}/\text{m}^3$ to 35 $\mu\text{g}/\text{m}^3$, and retained the annual fine particle standard at 15.0 $\mu\text{g}/\text{m}^3$. In 2012, EPA retained the 24-hour PM_{2.5} standard, but strengthened the annual standard to 12.0 $\mu\text{g}/\text{m}^3$. Elements of the NAAQS include the indicator, averaging period, level, and form of the standard. The indicator specifies the pollutant and whether it is primary or secondary; the averaging period specifies whether it is 24-hour, annual, etc.; the level specifies the concentration that provides protection for public health; and the form specifies the metrics used to assess compliance with the level of the standard (e.g., average annual, 98th percentile, etc.).

The 24-hour PM_{2.5} standard is calculated using a three-year average of annual 98th percentile values. The “design value” is calculated from a three-year period of data EPA defines as the reference for assessing progress towards attainment. EPA specified 2008 as the base year for areas designated as nonattainment for the 2006 24-hour PM_{2.5} standard. The design value for the base year was calculated from 98th percentile values for 2006, 2007, and 2008. A description of that calculation is presented in Appendix III.D.7.8. The base year 2008 design value calculated for Fairbanks is 40.7 $\mu\text{g}/\text{m}^3$. The design value is updated with each new year of monitoring data (i.e., it changes year to year).

In order to assess the impact of air quality controls, it is necessary to first model the baseline conditions that lead to concentrations that are representative of the Fairbanks design day. Since 2008 was selected as the base year for planning, the Borough, DEC, and EPA evaluated the monitoring and meteorological data from that year to find episodes that could be used to represent typical conditions in Fairbanks when concentrations exceed the standard at “design day” levels. The agencies reviewed the monitored concentrations, meteorological conditions, and the results of a principal component analysis of their relationship to find episodes that met the criteria listed below.

- Days with 24-hour concentrations near 41 $\mu\text{g}/\text{m}^3$ (the design day is the average of the modeling episode dates ambient monitored by FRM and/or BAM).
- Days with speciation measurements available to provide insight into the chemical composition of recorded mass and an assessment of model performance.
- Meteorological conditions that represent typical inversion scenarios for days exceeding the standard—these are steady-state conditions where high concentrations ebb and flow and there is no appreciable change in meteorology.
- Meteorological conditions that represent a period when an approaching high-pressure system causes a rapid increase in concentrations.

- Episodes having multiple days above the standard and in the vicinity of the design day to provide better statistical confidence from modeling analyses.
- A sufficient “lead-in” period of 3-4 days prior to a higher concentration event to allow an air quality model to come to equilibrium and then follow natural fluctuations in pollutants.

Ultimately the agencies selected the two periods described below for use in the planning process.

1. *January 23 – February 10, 2008.* This episode would provide insight into conditions for near design day concentrations as well as more severe conditions producing substantially higher concentrations (i.e., those associated with an advancing high-pressure system). This is a period with colder temperatures. A summary of the concentrations and temperatures recorded for each day as well as the availability of speciation data is presented in Table 7.3-1.
2. *November 2 -17, 2008.* This episode reflects the stable conditions with the ebb and flow in concentrations; it has a corrected BAM value of 41.1 and an FRM value on the preceding day of 40.4. It occurs under relatively warmer temperatures, with lower space heating emissions and lower ventilation rates. A summary of the concentrations and temperatures recorded for each day, as well as the availability of speciation data, is presented in Table 7.3-2.

These multi-day episodes meet the above criteria and allow for analysis of days leading up to high concentrations, design day conditions, and days that exceed design day conditions. These episodes provide a reasonable baseline for analyzing controls to see what impact they have on reducing emissions to levels below the standard, while also allowing the Borough to assess how those controls may impact days with concentrations that exceed the 41 $\mu\text{g}/\text{m}^3$ design value.

Table 7.3-1
Summary of Fairbanks PM_{2.5} Concentrations* and Daily Temperatures
During January/February 2008 Design Episode

Date	24-hour Concentrations ($\mu\text{g}/\text{m}^3$)			Daily Temperatures (°F)		
	FRM	BAM	Speciation Data Available	Max	Min	Average
01/23/08		5.9		23	-11	6
01/24/08		27.2		-4	-30	-17
01/25/08	17.5	22.2	Yes	0	-31	-15
01/26/08		46.8		-25	-44	-34
01/27/08		35.8		-12	-43	-27
01/28/08	19.6	22.2	Yes	-6	-24	-15
01/29/08		42.0		-20	-31	-25
01/30/08		55.1		-15	-28	-21
01/31/08	No Data	19.9	Yes	-6	-15	-10
02/01/08		24.0		-5	-14	-9
02/02/08		13.2		-8	-30	-19
02/03/08	23.5	24.8	Yes	-19	-40	-29
02/04/08		51.7		-29	-44	-36
02/05/08		68.2		-29	-46	-37
02/06/08	No Data	71.0	Yes	-30	-47	-38
02/07/08		61.1		-29	-47	-38
02/08/08		73.4		-24	-46	-35
02/09/08	40.5	45.7	Yes	-15	-44	-29
02/10/08		32.7		-12	-48	-30

* FRMs were operated once every three days; BAMs collected hourly values, which were used to calculate 24-hour averages.

Table 7.3-2
Summary of Fairbanks PM_{2.5} Concentrations* and Daily Temperatures
During November 2008 Design Episode

Date	24-hour Concentrations ($\mu\text{g}/\text{m}^3$)			Daily Temperatures (°F)		
	FRM	BAM	Speciation Data Available	Max	Min	Average
11/02/08	15.5	15.6		8	-6	1
11/03/08		6.6		12	2	7
11/04/08		9.7		14	-2	6
11/05/08	40.4	38.8		7	-10	-1
11/06/08		41.1		8	-11	-1
11/07/08		26.8		1	-17	-8
11/08/08	37.0	35.6	Yes	2	-12	-5
11/09/08		41.1		1	-15	-7
11/10/08		23.4		16	-5	6
11/11/08	27.4	23.7	Yes	17	-1	8
11/12/08		11.9		14	3	9
11/13/08		20.4		15	-9	3
11/14/08	50.7	51.1	Yes	3	-11	-4
11/15/08		29.4		14	-2	6
11/16/08		48.4		8	-13	-2
11/17/08	20.0	18.9		16	3	10

* FRMs were operated once every three days; BAMs collected hourly values, which were used to calculate 24-hour averages.