

How to find device information and photo requirement examples


Applications for Waivers (NOASH and Stage 1) will need to include specific information regarding the device. Below are examples of various labels and where to find the required information.

Applications must also include photographs of the front of the device, side of the device, and label for each device seeking a waiver.

Pictures of the label must clearly show all the data on the plate as seen below:

- ☒ **Make & Model**
- ☒ **Serial No.**
- ☒ **Manufacture Date**
- ☒ **EPA Certification & Emissions (if listed)**

EXAMPLE DATA PLATES/LABELS

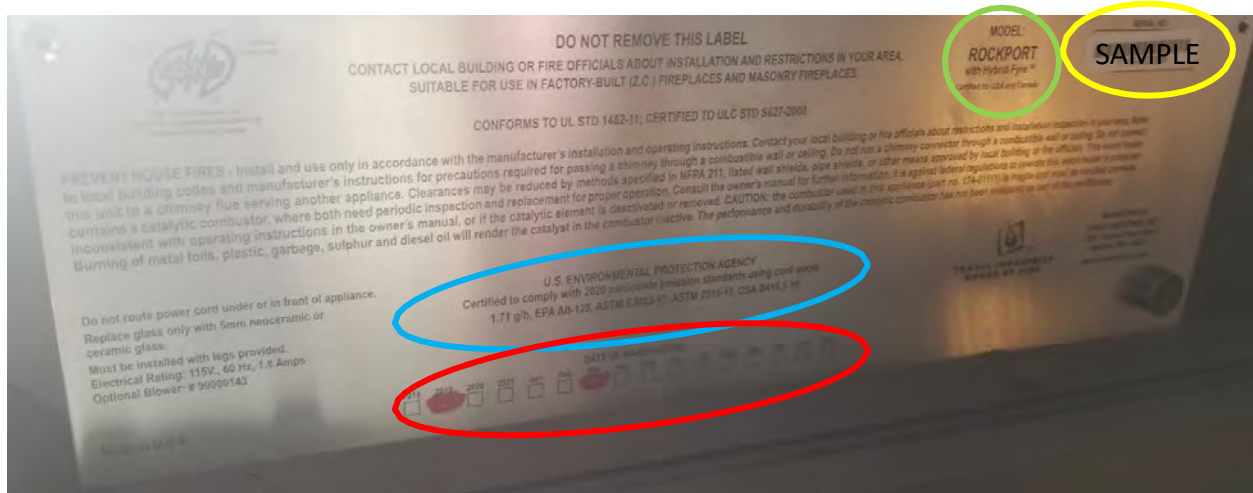

PELLET FUEL ROOM HEATER

"This wood heater needs periodic inspection and repair for proper operation. Consult the owner's manual for further information. It is against federal regulations to operate this wood heater in a manner inconsistent with the operating instructions in the owner's manual."

"U.S. ENVIRONMENTAL PROTECTION AGENCY Certified to comply with 2020 particulate emissions standards using pellet fuel."

Certified To: ASTM E2779-2010 & ASTM E2515-2011

This appliance requires the use of
"Premium Quality" Wood Pellet fuel.



Model: Serenity Emission: 1.119 g/hr

Intertek
W/N 21187

Date of Manufacture: 07-01-19

Manufactured By: A. J. Samuels

Serial Number: SAMPLE

24550



Intertek
W/N 21203

MODEL 25-CB120 / 55-SHPCB120 / 55-TRPCB120

PELLET FUEL ROOM HEATER; FREE STANDING MODEL ALSO FOR
USE IN MOBILE HOMES

CERTIFIED TO UL 1482-11 / ASTM E 1509-12 / ULC S627-00

EPA TEST METHOD ASTM 2779-10

MANUFACTURED BY:
ENGLAND'S STOVE WORKS, INC.
589 S. FIVE FORKS RD.
MONROE, VA 24574

MANUFACTURE DATE:


SERIAL NUMBER: SAMPLE

PREVENT HOUSE FIRES

- INSTALL AND USE ONLY IN ACCORDANCE WITH THE OWNER'S MANUAL PROVIDED WITH THE APPLIANCE.
- CONTACT LOCAL BUILDING OR FIRE OFFICIALS ABOUT RESTRICTIONS AND INSTALLATION INSPECTIONS IN YOUR AREA.
- FOR USE WITH WOOD PELLET FUEL ONLY, 1/4 INCH DIAMETER.
- DO NOT CONNECT THIS UNIT TO A CHIMNEY FLUE SERVING ANOTHER APPLIANCE.
- KEEP VIEWING AND ASH REMOVAL DOORS TIGHTLY CLOSED DURING OPERATION.
- INPUT RATING - 3.8 LBS/HR.
- EMISSION VALUE - 1.37 GRAMS/HR.
- U.S. ENVIRONMENTAL PROTECTION AGENCY CERTIFIED TO COMPLY WITH 2020 PARTICULATE EMISSION STANDARDS USING PELLET FUEL.
- U.S. TEST STANDARD: US EPA 40 CFR PART 60, SUBPART 60.536
- USE ONLY APPROVED TYPE L OR P PELLET VENT PIPE.
- INSPECT AND CLEAN EXHAUST VENTING SYSTEM FREQUENTLY.


FREESTANDING INSTALLATION REQUIREMENTS - REFER TO LOCAL CODES AND THE CHIMNEY MANUFACTURER'S INSTRUCTIONS FOR PRECAUTIONS REQUIRED FOR PASSING A CHIMNEY THROUGH A COMBUSTIBLE WALL OR CEILING. PLACE ON NON-COMBUSTIBLE FLOOR PROTECTION WHICH EXTENDS 6-INCHES TO THE FRONT AND 6-INCHES ON EACH SIDE OF THE FUEL OPENING. SEE OWNER'S MANUAL FOR ADDITIONAL CLEARANCE INFORMATION.

BACKWALL/SIDEWALL




A = 9 INCHES (229 MM)
C = 10 INCHES (254 MM)

CORNER



B = 10 INCHES (254 MM)
D = 6 INCHES (152.4 MM)

FLOOR PROTECTION



ELECTRICAL RATING: 4:0 A, 115 V, 60 HZ. ROUTE THE POWER CORD SO THAT IT DOES NOT COME INTO CONTACT WITH ANY HOT SURFACES ON THE UNIT AND DOES NOT CROSS IN FRONT OF THE UNIT.

CAUTION - MOVING PARTS MAY CAUSE INJURY. DO NOT OPERATE UNIT WITH PANELS REMOVED.

CAUTION - HOT PARTS. DO NOT OPERATE UNIT WITH PANELS REMOVED.

DANGER - RISK OF ELECTRIC SHOCK. DISCONNECT POWER BEFORE SERVICING UNIT.

CAUTION - OPERATE THIS UNIT ONLY WITH THE FUEL HOPPER LID CLOSED. FAILURE TO DO SO MAY RESULT IN EMISSION OF PRODUCTS OF COMBUSTION FROM THE HOPPER UNDER CERTAIN CONDITIONS. MAINTAIN HOPPER SEAL IN GOOD CONDITION. DO NOT OVERFILL THE HOPPER.

THIS WOOD HEATER NEEDS PERIODIC INSPECTION AND REPAIR FOR PROPER OPERATION. CONSULT THE OWNER'S MANUAL FOR FURTHER INFORMATION. IT IS AGAINST FEDERAL REGULATIONS TO OPERATE THIS WOOD HEATER IN A MANNER INCONSISTENT WITH THE OPERATING INSTRUCTIONS IN THE OWNER'S MANUAL.



CAUTION: HOT WHILE IN OPERATION. DO NOT TOUCH. KEEP CHILDREN, CLOTHING, AND FURNITURE

EXAMPLE DEVICE PICTURES: SIDES AND FRONT



Stove Front



Stove Left



Stove Right